


Telephone Cables

PVC Insulated, PVC Sheathed Telephone Cable
TC/PVC/PVC

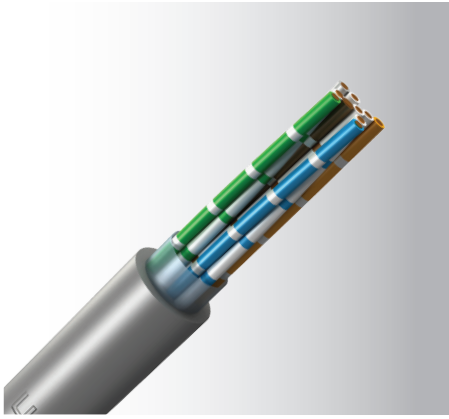

Standard Reference IDA TS L1-1 or L1-2/
BPO CW1308

Application :	This cable is primarily used to connect subscribers' equipment within a building
Construction :	Solid annealed copper wires uniformly coated with tin, PVC Insulated, PVC sheathed cable

Nominal Conductor Dia.	Insulation Min. Radial Thickness	Max. Dia. Over Coating	Min. Insulation Resistance	Max. Conductor Resistance	Capacitance Unbalance
(mm)	(mm)	(mm)	(MΩ/km)	(Ω/km)	(pF/500MΩ)
0.5	0.15	0.95	>500	97.8	500

Specification: IDA LS 1-1 or L-2

Specification: BPO CW1308

Description	Minimum Sheath Thickness	Approx. Overall Dia.	Description	Construction	Minimum Sheath Thickness	Approx. Overall Dia.
(-)	(mm)	(mm)	(-)	(-)	(mm)	(mm)
1/0.5 x 2 pair	0.4	3.5	1/0.5 x 1 W	1 WB	0.4	2.2
1/0.5 x 3 pair	0.5	5.3	1/0.5 x 2 W	1 Pair	0.4	3.3
1/0.5 x 4 pair	0.5	5.8	1/0.5 x 4 W	2 Pair	0.4	4.0
1/0.5 x 5 pair	0.6	6.5	1/0.5 x 6 W	3 Pair	0.5	5.3
1/0.5 x 10 pair	0.7	8.3	1/0.5 x 8 W	4 Pair	0.5	5.8
1/0.5 x 20 pair	0.8	10.7	1/0.5 x 12 W	6 Pair	0.6	6.8
1/0.5 x 40 pair	0.9	14.2	1/0.5 x 20 W	10 Pair	0.6	8.3
1/0.5 x 80 pair	1.0	21.8	1/0.5 x 30 W	10 Tr	0.7	9.8
1/0.5 x 100 pair	1.0	22.6	1/0.5 x 40 W	20 Pair	0.7	10.7
			1/0.5 x 50 W	25 Pair	0.8	11.4
			1/0.5 x 60 W	30 Pair	0.8	12.2
			1/0.5 x 80 W	40 Pair	0.9	14.2
			1/0.5 x 100 W	50 Pair	1.0	15.7
			1/0.5 x 120 W	60 Pair	1.0	16.3
			1/0.5 x 150 W	50 Tr	1.1	17.8
			1/0.5 x 200 W	100 Pair	1.4	22.6